


- #### SPECIFIC NOTES:
- 1 PROVIDE 480V POWER CONNECTION TO AIR COOLED CHILLER CONTROL PANEL. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH DIVISION 15 PRIOR TO ROUGH-IN.
 - 2 PROVIDE 120V POWER CONNECTION TO AIR COOLED CHILLER FOR CONTROLS, ETC. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH DIVISION 15 PRIOR TO ROUGH-IN.
 - 3 PROVIDE 600V, NEMA SIZE 1 COMBINATION MOTOR STARTER/FUSED DISCONNECT SWITCH FOR PUMP. COORDINATE EXACT LOCATION AND FUSING REQUIREMENTS WITH DIVISION 15 PRIOR TO ROUGH-IN.
 - 4 PROVIDE 480V POWER CONNECTION TO AIR HANDLING UNIT SUPPLY FAN VARIABLE FREQUENCY DRIVE (VFD). VFD IS FURNISHED BY DIVISION 15, INSTALLED AND WIRED BY DIVISION 16. COORDINATE EXACT LOCATION AND REQUIREMENTS WITH DIVISION 15 PRIOR TO ROUGH-IN.
 - 5 FURNISH WITH LOCKING ATTACHMENT.
 - 6 BOILER ROOM EMERGENCY SHUNT SWITCH. SEE DIVISION 15 WIRING DIAGRAMS FOR ADDITIONAL INFORMATION.
 - 7 PROVIDE RAISED 6" CONCRETE PAD.

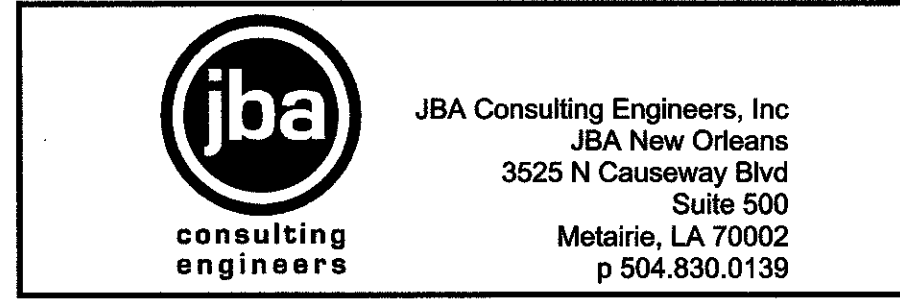

no.	revisions	date
1		
2		
3		
4		
5		
6		

HARRY HURST MIDDLE SCHOOL WING ADDITION
 1 Roadrunner Lane, Destrehan, Louisiana 70047
 ENLARGED PLANS AND DETAILS

		drawing number E4.00
	project number 10.0123	date 06.14.2010
phase CD		

COPYRIGHT AND ALL RIGHTS RESERVED BY MURRAY ARCHITECTS. THIS DOCUMENT IS THE PROPERTY OF MURRAY ARCHITECTS AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. WITHOUT THE WRITTEN PERMISSION OF MURRAY ARCHITECTS, THIS DOCUMENT IS NOT TO BE USED FOR ANY OTHER PROJECT OR AT ANY OTHER LOCATION WITHOUT THE WRITTEN PERMISSION OF MURRAY ARCHITECTS. ALL RIGHTS ARE RESERVED TO MURRAY ARCHITECTS.