


FINISH SCHEDULE

NO.	ROOM	FLOOR	BASE			WALLS			CEILING			CLG HT	REMARKS												
			STAINED CONCRETE	SEALED CONCRETE	SCORED AND STAINED CONCRETE	VINYL COMPOSITE TILE	PORCELAIN TILE	CARPET	QUARRY TILE	6" RUBBER COVE	4" PORCELAIN TILE COVE BASE			4" QUARRY TILE COVE BASE	NO BASE	GYP BD, PAINT	12" x 12" PORCELAIN TILE	CMU, PAINT	GYP BD, "MR", EPOXY PAINT	CMU, EPOXY PAINT	SPLIT FACED CMU (SFCMU)	GYP BD, HI IMPACT, PAINT	GYP BD, HI IMPACT, "MR", EPOXY PAINT	ACOUSTICAL WALL PANELS	SUSP'D GYP BD CLG, EPOXY PAINT
101	LOBBY												VARIES	SEE SECTION											
102	EXHIBIT HALL												VARIES	SEE INTERIOR ELEVATIONS											
103	KITCHEN												9'-0"	(ALTERNATE No 1)											
104	JANITOR												9'-0"	(ALTERNATE No 1)											
A101	TICKETS												9'-0"	(ALTERNATE No 2)											
A101A	VAULT												9'-0"	(ALTERNATE No 2)											
A102	BUSINESS												9'-0"	(ALTERNATE No 2)											
A103	BREAK ROOM												9'-0"	(ALTERNATE No 2)											
A104	OFFICIALS												9'-0"	(ALTERNATE No 2)											
A105	TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS (ALTERNATE No 2)											
A106	CCTV												9'-0"												
A107	OFFICE												10'-0"	(ALTERNATE No 2)											
A108	CLOSET												9'-0"	(ALTERNATE No 2)											
A109	FOYER												9'-0"	(ALTERNATE No 2)											
A110	CORRIDOR												9'-0"	(ALTERNATE No 2)											
A111	CONFERENCE ROOM												10'-0"	(ALTERNATE No 2)											
A112	WOMEN'S TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS (ALTERNATE No 2)											
A113	MEN'S TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS (ALTERNATE No 2)											
A114	CLOSET												9'-0"	(ALTERNATE No 2)											
A115	JANITOR												9'-0"	(ALTERNATE No 2)											
A116	CORRIDOR												9'-0"	(ALTERNATE No 2)											
A117	MECHANICAL												VARIES												
A118	SWITCH												9'-0"												
A119	OFFICE												9'-0"	(ALTERNATE No 2)											
A120	HALL												9'-0"	(ALTERNATE No 2)											
A121	OFFICE												10'-0"	(ALTERNATE No 2)											
A122	OFFICE												10'-0"	(ALTERNATE No 2)											
A123	CLOSET												9'-0"	(ALTERNATE No 2)											
A124	CLOSET												9'-0"	(ALTERNATE No 2)											
A125	OFFICE												10'-0"	(ALTERNATE No 2)											
A126	TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS (ALTERNATE No 2)											
A127	SERVER												9'-0"												
A128	HALL												9'-0"	(ALTERNATE No 2)											
A129	OFFICE												10'-0"	(ALTERNATE No 2)											
A130	STACK												VARIES												
A131	ELECTRICAL												VARIES												
B101	VESTIBULE												10'-0"												
B102	MECHANICAL												VARIES												
B103	FITNESS CENTER												10'-0"												
B104	SUPPLY												10'-0"												
B105	TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B106	LOCKER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B107	SHOWER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B108	LOCKER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B109	SHOWER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B110	JANITOR												9'-0"												
B111	TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B112	LOCKER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B113	SHOWER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B114	LOCKER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B115	SHOWER ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
B116	ELECTRICAL CLOSET												VARIES												
B117	ELECTRICAL CLOSET												VARIES												

FINISH SCHEDULE

NO.	ROOM	FLOOR	BASE			WALLS			CEILING			CLG HT	REMARKS												
			STAINED CONCRETE	SEALED CONCRETE	SCORED AND STAINED CONCRETE	VINYL COMPOSITE TILE	PORCELAIN TILE	CARPET	QUARRY TILE	6" RUBBER COVE	4" PORCELAIN TILE COVE BASE			4" QUARRY TILE COVE BASE	NO BASE	GYP BD, PAINT	12" x 12" PORCELAIN TILE	CMU, PAINT	GYP BD, "MR", EPOXY PAINT	CMU, EPOXY PAINT	SPLIT FACED CMU (SFCMU)	GYP BD, HI IMPACT, PAINT	GYP BD, HI IMPACT, "MR", EPOXY PAINT	ACOUSTICAL WALL PANELS	SUSP'D GYP BD CLG, EPOXY PAINT
C101	MAINTENANCE												VARIES												
C102	EQUIPMENT STORAGE												VARIES												
C103	RECEIVING												VARIES												
C104	MEN'S TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
C105	WOMEN'S TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
C106	CORRIDOR												9'-0"												
C107	JANITOR												9'-0"												
C108	LIQUOR STORAGE												9'-0"												
C109	PANTRY												9'-0"												
C110	CONCESSION												9'-0"												
C111	EQUIPMENT STORAGE												VARIES												
C112	ELECTRICAL												VARIES												
D101	EQUIPMENT STORAGE												VARIES												
D102	SPRINKLER												VARIES												
D103	CONCESSION												9'-0"												
D104	PANTRY												9'-0"												
D105	ELECTRICAL												VARIES												
D106	JANITOR												9'-0"												
D107	CORRIDOR												9'-0"												
D108	MEN'S TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
D109	WOMEN'S TOILET ROOM												9'-0"	SEE INTERIOR ELEVATIONS											
D110	STACK												VARIES												
D111	RECEIVING												VARIES												
D112	ELECTRICAL												VARIES												
E101	BOILER ROOM												VARIES												
E102	EQUIPMENT PLATFORM												VARIES												
E103	EQUIPMENT PLATFORM												VARIES												

project no. 20-0601
 drawn JDR
 checked JJP
 date 01.15.2010
 revised

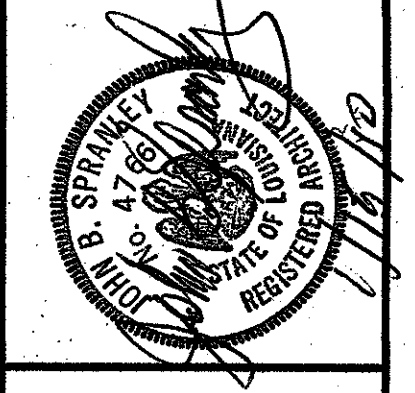

MEYER ENGINEERS, LTD.
 ENGINEER & ARCHITECT

**VAL RISS PARK
 MULTI-PURPOSE BUILDING
 ST. BERNARD PARISH, OWNER**

FINISH SCHEDULE
 sheet no. **A6.0**
 of ___ sheets